


UPE-male L12 BG2 f. Multi-Faster-

Hydraulic inserts for MultiFaster couplings - male - connectable under pressure
 Light duty
 Connection thread: outer thread 24° chamfer suitable for pipe fittings
 DIN 2353 and DKL/DKOL

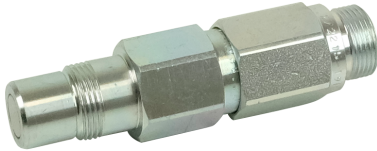

Article numbers

Article No. (S): 409280218

Pricing information

List price

Your price

On request

ERP-INFO

Scale of prices

Productdata

Features	Feature
Series	2
Connecting thread	M 18X1,5
Pipe connection	L12

Features	Feature
Unit	STK
Flow rate max. (l/min)	40
Cf.-no.	KIT3FNP38-2/18M
PN [bar]	250
Ø [mm]	19.8
Product Header	Hydraulic inserts for MultiFaster couplings - male - connectable under pressure

Variants

Article No.	Cf.-no.	Connecting thread	Flow rate max. (l/min)	PN [bar]	Pipe connection	Series	Unit	Ø [mm]	Price
409280218	KIT3FNP38-2/18M	M 18X1,5	40	250	L12	2	STK	19.8	On request
409280222	KIT3FNP38-2/22M	M 22X1,5	40	250	L15	2	STK	19.8	On request
409280318	KIT3FNP12-2/18M	M 18X1,5	70	250	L12	3	STK	24.5	On request
409280322	KIT3FNP12-2/22M	M 22X1,5	70	250	L15	3	STK	24.5	On request
409280220	KIT3FNP38-3/20M	-	40	250	S12	2	STK	19.8	On request